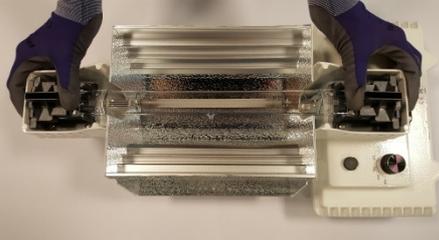
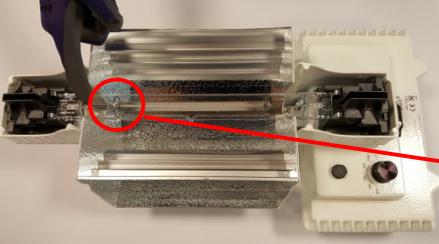
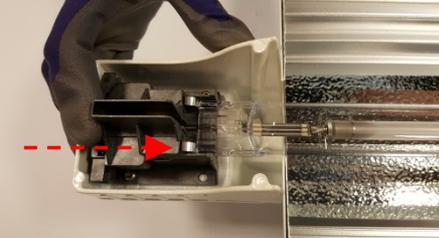


## Installation

	<p><b>Box contents</b></p> <p>The box contains the following items:</p> <ul style="list-style-type: none"> <li>- 1x PAPHILLON® E-Light 1000W-240V Low profile, including:             <ul style="list-style-type: none"> <li>o 1x lamp, High Pressure Sodium 1000W-DE</li> <li>o 1x reflector Papillon 1000W</li> <li>o 1x long eye bolt</li> </ul> </li> <li>- 1x short eye bolt</li> <li>- 1x connecting cable</li> </ul>
	<p><b>Mounting the fixture</b></p> <ul style="list-style-type: none"> <li>- Place and tighten the short eye bolt in the 'front' of the fixture</li> <li>- The long eye bolt is already placed in the 'back' of the fixture</li> <li>- After tightening the eye bolts the fixture can be mounted with wires</li> </ul>
	<ul style="list-style-type: none"> <li>- Use integrated spirit level indicator on the back to level the fixture</li> <li>- The fixture is levelled correctly when the bubble in the spirit level indicator is centred.</li> <li>- A not properly levelled fixture will result in poor light uniformity on the crop and possible light spill</li> </ul>
	<p><b>Connecting the fixture</b></p> <ul style="list-style-type: none"> <li>- Connect the power cable from the fixture to the power supply</li> </ul>
	<p><b>Power</b></p> <ul style="list-style-type: none"> <li>- Use the control knob to adjust the light output.</li> <li>- Output scale represents the power to the lamp</li> </ul>

## Lamp replacement

	<p><b>Removing the lamp</b></p> <ul style="list-style-type: none"> <li>- Warning! Switch off the mains voltage before commencing maintenance</li> <li>- Advise: always wear cotton gloves when handling double-ended lamps</li> <li>- Unlock both lamp holders and remove the lamp</li> </ul>
	<p><b>Lamp positioning</b></p> <ul style="list-style-type: none"> <li>- Capacitor of lamp, this side of the lamp has to be placed <u>opposite</u> the electronics compartment. See picture:</li> </ul>
	<p><b>Closing the lamp holders 1</b></p> <ul style="list-style-type: none"> <li>- After replacing the lamp, slide both lamp holders until they lock back in place in order to secure the lamp</li> </ul>
	<p><b>Closing the lamp holders 2</b></p> <ul style="list-style-type: none"> <li>- Ensure that both lamp holders are fully closed against the stop. If not, risk of defect lamp holder and lamp</li> </ul>

## General product standards and specifications

The product satisfies the following standards: EN60598-2-1, EN62031, EN62471, EN55015.

Name	PAPILLON® -Light 1000W-
Market	

### Mechanical

Product	47cm x 24.
	5.4 Kg
	IP20

### Electrical

	+/- 10%
	<40 Amp
	> 0.97
Input frequency	50/60 Hz
Lamp type	High Pressure Sodium 1000 Watt EL

### Other

Ambient temperatur	0 ~ 30°C
	5% ~ 85%, non-condensing
Marking	
Warranty	